


技术参数
Technical data

工作电流: 16A
工作电压: 400/500V
阻燃等级: (据 UL94) : V0
防护等级: IP65
接线形式:
螺钉压接, 弹片压接
电缆入口可选螺纹:
M20,M25,PG16,PG21

Rated current:16A
Rated voltage:400/500V
Flammability acc.to UL94:V0
Degree of protection acc.to DIN40 050:IP65
Terminal:Screw terminal
Spring terminal
Thread:M20,M25,PG16,PG21

HE 系列 24 回路接插件套件 (带双扣)
Series 24 Poles of connector (With 2 levers)


24+

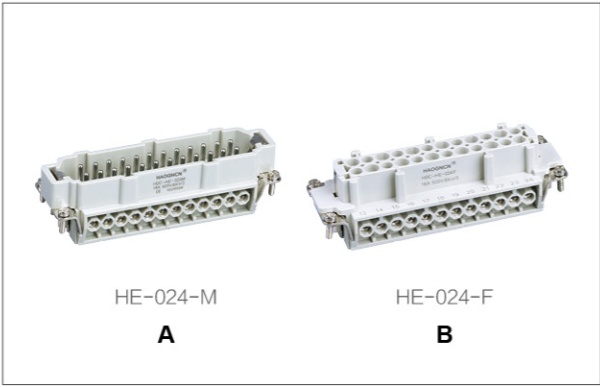

注: A, B, C, D 为一套组件

C													
	H24B-TS	H24B-TG	H24B-TSH	H24B-TGH	H24B-TSB	H24B-TGB							
D													
	H24B-AG	H24B-AG	H24B-SGR	H24B-SGR	H24B-AD-4B	H24B-SDR-4B							
<table><tr><td>HDC-HE-024-1 侧面进线 skde entry</td><td>HDC-HE-024-2 正面进线 Top entry</td><td>HDC-HE-024-3 表面安装 Surface mounted</td><td>HDC-HE-024-4 表面安装 Surface mounted</td><td>HDC-HE-024-1 开孔带盖 (侧面) BulkHAnd mounted</td><td>HDC-HE-024-4 表面安装 (带盖) Surface mounted</td><td></td></tr></table>							HDC-HE-024-1 侧面进线 skde entry	HDC-HE-024-2 正面进线 Top entry	HDC-HE-024-3 表面安装 Surface mounted	HDC-HE-024-4 表面安装 Surface mounted	HDC-HE-024-1 开孔带盖 (侧面) BulkHAnd mounted	HDC-HE-024-4 表面安装 (带盖) Surface mounted	
HDC-HE-024-1 侧面进线 skde entry	HDC-HE-024-2 正面进线 Top entry	HDC-HE-024-3 表面安装 Surface mounted	HDC-HE-024-4 表面安装 Surface mounted	HDC-HE-024-1 开孔带盖 (侧面) BulkHAnd mounted	HDC-HE-024-4 表面安装 (带盖) Surface mounted								


常用组合套件 /Set general introduction

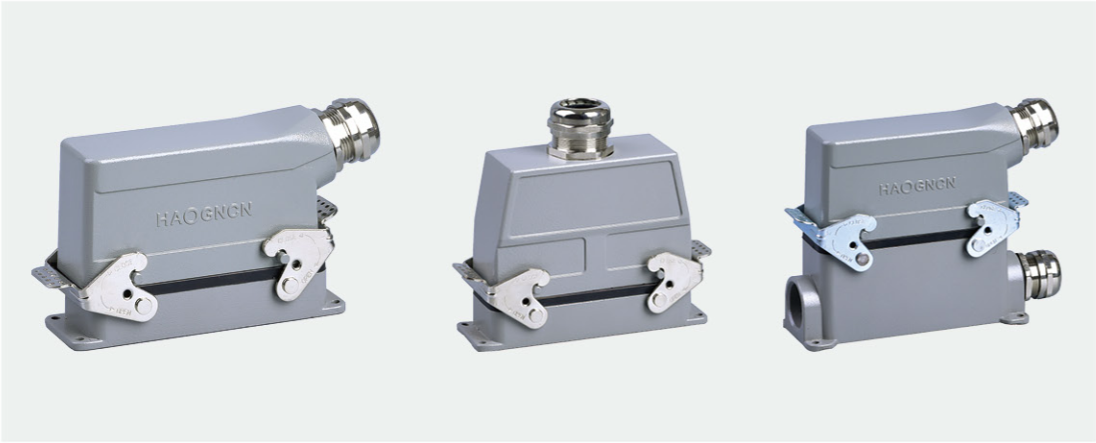

Note: 配套外壳 Suit hood/housing:Size H24B
外壳详细参数见 " 外壳部分 "
Hood/Housing detail on"Hood/Housing"section

HE 系列 24 回路接插件套件 (带单扣)
Series 24 Poles of connector (With 1 levers)

24+

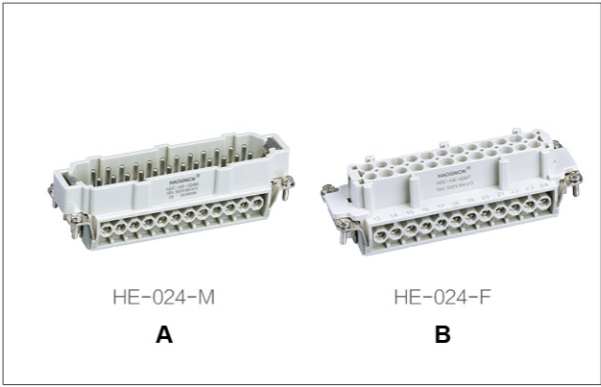

注: A, B, C, D 为一套组件

C													
	H24B-TS-2B	H24B-TG-2B	H24B-TSH-2B	H24B-TGH-2B	H24B-TS-2B	H24B-TG-2B							
D													
	H24B-AG-LB	H24B-AG-LB	H24B-SGR-LB	H24B-SGR-LB	H24B-AD-LB	H24B-SDR-LB							
<table><tr><td>HDC-HE-024-1 侧面进线 skde entry</td><td>HDC-HE-024-2 正面进线 Top entry</td><td>HDC-HE-024-3 表面安装 Surface mounted</td><td>HDC-HE-024-4 表面安装 Surface mounted</td><td>HDC-HE-024-1 开孔带盖 (侧面) BulkHAnd mounted</td><td>HDC-HE-024-4 表面安装 (带盖) Surface mounted</td><td></td></tr></table>							HDC-HE-024-1 侧面进线 skde entry	HDC-HE-024-2 正面进线 Top entry	HDC-HE-024-3 表面安装 Surface mounted	HDC-HE-024-4 表面安装 Surface mounted	HDC-HE-024-1 开孔带盖 (侧面) BulkHAnd mounted	HDC-HE-024-4 表面安装 (带盖) Surface mounted	
HDC-HE-024-1 侧面进线 skde entry	HDC-HE-024-2 正面进线 Top entry	HDC-HE-024-3 表面安装 Surface mounted	HDC-HE-024-4 表面安装 Surface mounted	HDC-HE-024-1 开孔带盖 (侧面) BulkHAnd mounted	HDC-HE-024-4 表面安装 (带盖) Surface mounted								

常用组合套件 /Set general introduction



Note: 配套外壳 Suit hood/housing:Size H24B
外壳详细参数见 " 外壳部分 "
Hood/Housing detail on"Hood/Housing"section

技术参数
Technical data

工作电流: 16A
工作电压: 400/500V
阻燃等级: (据 UL94) : V0
防护等级: IP65
接线形式:
螺钉压接, 弹片压接
电缆入口可选螺纹:
M20,M25,PG16,PG21

Rated current:16A
Rated voltage:400/500V
Flammability acc.to UL94:V0
Degree of protection acc.to DIN40 050:IP65
Terminal:Screw terminal
Spring terminal
Thread:M20,M25,PG16,PG21