


6. AD5i 型地址码编程器 Address programmer

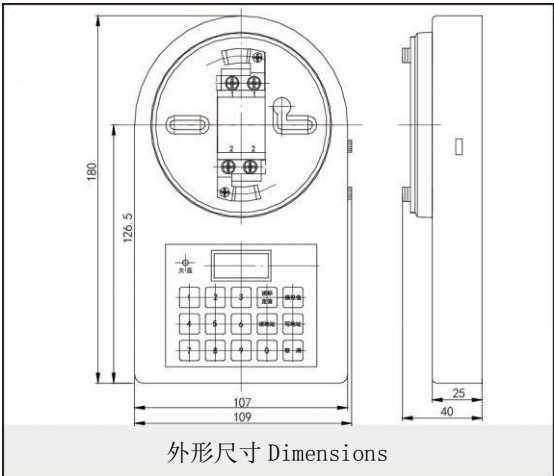

特点 | Feature

- 体积小，携带方便。
Dimension is small and easy to carry.
- 本身带 5i 通用底座，可直接将探测器旋上后进行地址输入，使用方便。
It has 5i standard base itself and the detector can be screwed and input address. It is easily used.
- 带电池欠压警示灯。
It has low-voltage alarm LED.
- 能用于对 5i/5Ei 系列总线器件进行地址输入和参数测试。
Can be used to input address and test parameters for 5i/5Ei series bus devices.

技术参数 | Technical specifications

工作电压 Operation voltage	DC24V/DC18V
功耗 Consumption	
监视电流 Monitoring current	$\leq 1.75\text{mA}/\text{DC24V}$; $\leq 1.9\text{mA}/\text{DC18V}$
动作电流 Operating current	$\leq 2.5\text{mA}/\text{DC24V}$; $\leq 3.9\text{mA}/\text{DC18V}$
工作温度 Operation temperature	$-10^{\circ}\text{C}\sim 50^{\circ}\text{C}$
相对湿度 Relative humidity	$\leq 95\%$
外形尺寸 Dimension	$180\times 107\times 25\text{ mm}^3$
重量 Weight	280g
颜色 Color	乳白色 Ivory-white
材料 Material	ABS